


Description Of The Icon



Aviation Pilot Core Drill 航太中心鑽頭

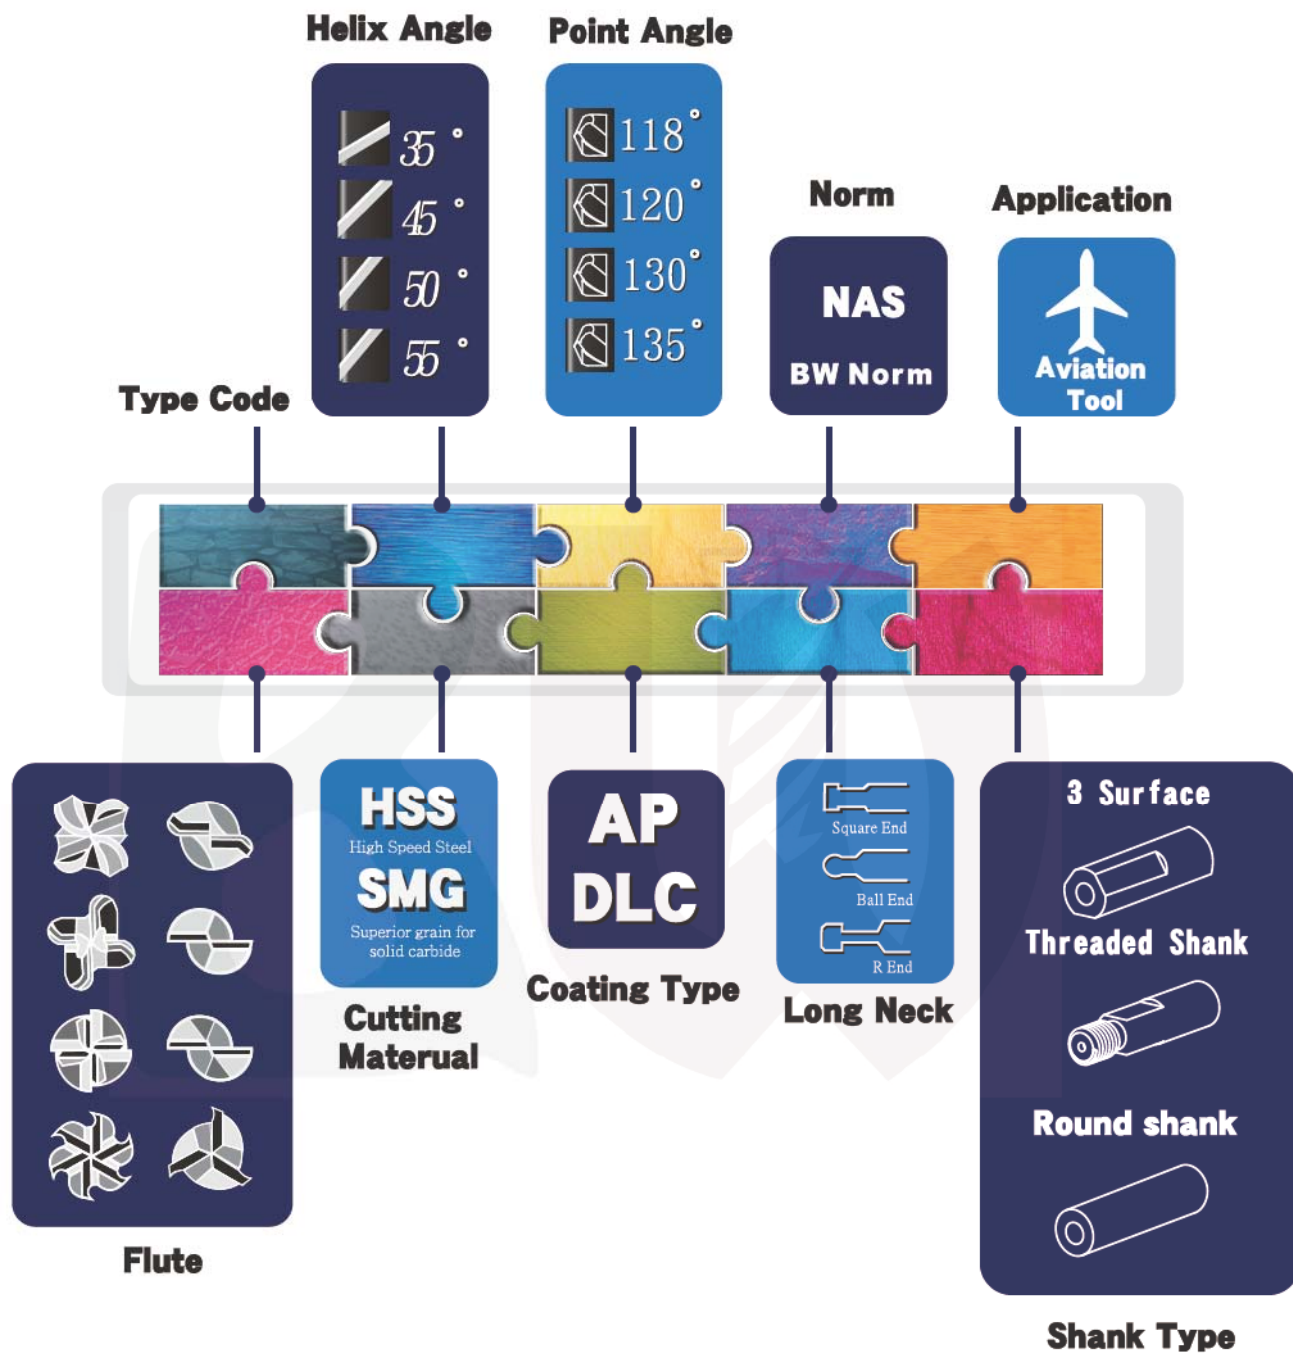

▼▼▼
領先中心鑽頭
Pilot Core Drill

P1 - CD
P4 - CD-D




▼▼▼
氣動領先中心鑽頭
Pneumatic Pilot Core Drill

P7 - PCD
P10 - PCD-D
P13 - PCD-2L
P16 - PCD-2L-D



HSS Pilot Core Drill

高速鋼領先中心鑽頭

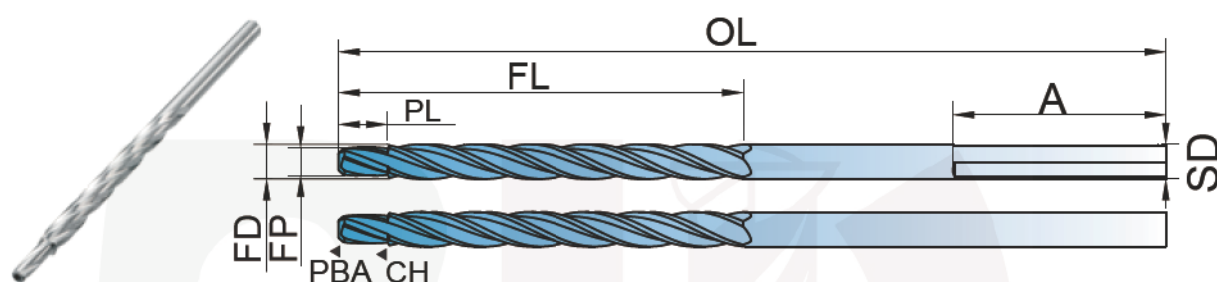

Order Code	Z	FD	PD	PL	FL	A	FS	CH	PBA	OL	HB	SD
型號	刃數	大直徑	小直徑	小直徑 刃長	大直徑 刃長	板手 長度	螺旋 角度	大直徑 倒角度	小直徑 倒角度	全長	柄徑 形狀	柄徑
CD1285-1120-50-1-12	4	0.1285	0.112	0.5	1.5	1.5	18°	118°	45°	3.2	3F	0.1285
CD1360-1190-50-1-12	4	0.1360	0.119	0.5	1.5	1.5	18°	118°	45°	3.2	3F	0.1360
CD1405-1240-50-1-12	4	0.1405	0.124	0.5	1.5	1.5	18°	118°	45°	3.2	3F	0.1405
CD1460-1240-50-1-12	4	0.1460	0.124	0.5	1.5	1.5	18°	118°	45°	3.2	3F	0.1460
CD1440-1280-50-1-12	4	0.1440	0.128	0.5	1.5	1.5	18°	118°	45°	3.2	3F	0.1440
CD1470-1280-50-1-12	4	0.1470	0.128	0.5	1.5	1.5	18°	118°	45°	3.2	3F	0.1470
CD1495-1350-50-1-12	4	0.1495	0.135	0.5	1.5	1.5	18°	118°	45°	3.2	3F	0.1495
CD1520-1350-50-1-12	4	0.1520	0.135	0.5	1.5	1.5	18°	118°	45°	3.2	3F	0.1520
CD1540-1400-50-1-12	4	0.1540	0.140	0.5	1.5	1.5	18°	118°	45°	3.2	3F	0.1540
CD1562-1400-50-1-12	4	0.1562	0.140	0.5	1.5	1.5	18°	118°	45°	3.2	3F	0.1562
CD1570-1430-50-1-12	4	0.1570	0.143	0.5	1.5	1.5	18°	118°	45°	3.2	3F	0.1570
CD1590-1460-50-1-16	4	0.1590	0.146	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1590
CD1610-1460-50-1-16	4	0.1610	0.146	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1610
CD1660-1510-50-1-16	4	0.1660	0.151	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1660
CD1696-1530-50-1-16	4	0.1696	0.153	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1696
CD1719-1550-50-1-16	4	0.1719	0.155	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1719
CD1730-1560-50-1-16	4	0.1730	0.156	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1730
CD1770-1600-50-1-16	4	0.1770	0.160	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1770
CD1800-1650-50-1-16	4	0.1800	0.165	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1800
CD1820-1650-50-1-16	4	0.1820	0.165	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1820
CD1850-1710-50-1-16	4	0.1850	0.171	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1850
CD1875-1710-50-1-16	4	0.1875	0.171	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1875
CD1890-1760-50-1-16	4	0.1890	0.176	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1890
CD1910-1760-50-1-16	4	0.1910	0.176	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1910
CD1935-1760-50-1-16	4	0.1935	0.176	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1935
CD1960-1790-50-1-16	4	0.1960	0.179	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1960
CD1990-1870-50-1-16	4	0.1990	0.187	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1990
CD2010-1870-50-1-16	4	0.2010	0.187	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.2010
CD2030-1870-50-1-16	4	0.2030	0.187	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.2030

HSS Pilot Core Drill

高速鋼領先中心鑽頭

Order Code	Z	FD	PD	PL	FL	A	FS	CH	PBA	OL	HB	inch SD
型號	刃數	大直徑	小直徑	小直徑 刀長	大直徑 刀長	板手 長度	螺旋 角度	大直徑 倒角度	小直徑 倒角度	全長	柄徑 形狀	柄徑
CD2040-1900-50-1-16	4	0.2040	0.190	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.2040
CD2055-1900-50-1-16	4	0.2055	0.190	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.2055
CD2090-1900-50-1-16	4	0.2090	0.190	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.2090
CD2130-1980-50-1-24	4	0.2130	0.198	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2130
CD2188-2020-50-1-24	4	0.2188	0.202	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2188
CD2210-2050-50-1-24	4	0.2210	0.205	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2210
CD2280-2120-50-1-24	4	0.2280	0.212	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2280
CD2340-2180-50-1-24	4	0.2340	0.218	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2340
CD2344-2180-50-1-24	4	0.2344	0.218	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2344
CD2380-2200-50-1-24	4	0.2380	0.220	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2380
CD2420-2270-50-1-24	4	0.2420	0.227	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2420
CD2460-2340-50-1-24	4	0.2460	0.234	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2460
CD2500-2340-50-1-24	4	0.2500	0.234	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2500
CD2570-2410-50-1-24	4	0.2570	0.241	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2570
CD2610-2450-50-1-24	4	0.2610	0.245	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2610
CD2658-2490-50-1-24	4	0.2658	0.249	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2658
CD2600-2490-50-1-24	4	0.2600	0.249	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2600
CD2720-2560-50-1-24	4	0.2720	0.256	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2720
CD2770-2650-50-1-24	4	0.2770	0.265	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2770
CD2810-2650-50-1-24	4	0.2810	0.265	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2810
CD2812-2650-50-1-24	4	0.2812	0.265	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2812
CD2900-2780-50-1-24	4	0.2900	0.278	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2900
CD2950-2800-50-1-24	4	0.2950	0.280	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2950
CD2969-2800-50-1-24	4	0.2969	0.280	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2969
CD3020-2890-50-1-24	4	0.3020	0.289	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.3020
CD3125-2960-50-1-24	4	0.3125	0.296	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.3125
CD3160-3010-50-1-24	4	0.3160	0.301	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.3160
CD3230-3120-50-1-24	4	0.3230	0.312	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.3230
CD3281-3120-50-1-24	4	0.3281	0.312	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.3281
CD3320-3120-50-1-24	4	0.3320	0.312	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.3320
CD3390-3270-50-1-24	4	0.3390	0.327	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.3390
CD3438-3270-50-1-24	4	0.3438	0.327	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.3438
CD3480-3310-50-1-24	4	0.3480	0.331	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.3480
CD3580-3430-50-1-24	4	0.3580	0.343	0.5	4.5	1.5	18°	118°	45°	7	3F	0.3580
CD3594-3430-50-1-24	4	0.3594	0.343	0.5	4.5	1.5	18°	118°	45°	7	3F	0.3594
CD3680-3570-50-1-24	4	0.3680	0.357	0.5	4.5	1.5	18°	118°	45°	7	3F	0.3680
CD3750-3590-50-1-24	4	0.3750	0.359	0.5	4.5	1.5	18°	118°	45°	7	3F	0.3750
CD3770-3590-50-1-24	4	0.3770	0.359	0.5	4.5	1.5	18°	118°	45°	7	3F	0.3770
CD3860-3590-50-1-24	4	0.3860	0.359	0.5	4.5	1.5	18°	118°	45°	7	3F	0.3860
CD3906-3760-50-1-24	4	0.3906	0.376	0.5	4.5	1.5	18°	118°	45°	7	3F	0.3906
CD3970-3850-50-1-24	4	0.3970	0.385	0.5	4.5	1.5	18°	118°	45°	7	3F	0.3970
CD4040-3900-50-1-24	4	0.4040	0.390	0.5	4.5	1.5	18°	118°	45°	7	3F	0.4040
CD4062-3900-50-1-24	4	0.4062	0.390	0.5	4.5	1.5	18°	118°	45°	7	3F	0.4062
CD4130-3900-50-1-24	4	0.4130	0.390	0.5	4.5	1.5	18°	118°	45°	7	3F	0.4130
CD4219-4050-50-1-24	4	0.4219	0.405	0.5	4.5	1.5	18°	118°	45°	7	3F	0.4219
CD4375-4210-50-1-24	4	0.4375	0.421	0.5	4.5	1.5	18°	118°	45°	7	3F	0.4375
CD4531-4370-50-1-24	4	0.4531	0.437	0.5	4.5	1.5	18°	118°	45°	7	3F	0.4531
CD4688-4820-50-1-24	4	0.4688	0.482	0.5	4.5	1.5	18°	118°	45°	7	3F	0.4688



PR

DD

GB

CD

ST

NC

NH

ACD

DC

SACC

SCC

SFHC

AFC

HSS Pilot Core Drill

高速鋼領先中心鑽頭



Order Code	Z	FD	PD	PL	FL	A	FS	CH	PBA	OL	HB	inch SD
型號	刃數	大直徑	小直徑	小直徑 刃長	大直徑 刃長	板手 長度	螺旋 角度	大直徑 倒角度	小直徑 倒角度	全長	柄徑 形狀	柄徑
CD4844-4680-50-1-24	4	0.4844	0.468	0.5	4.5	1.5	18°	118°	45°	7.5	3F	0.4844
CD5000-4830-50-1-24	4	0.5000	0.483	0.5	4.5	1.5	18°	118°	45°	7.5	3F	0.5000
CD5312-5140-50-1-24	4	0.5312	0.514	0.5	4.5	1.5	18°	118°	45°	7.5	3F	0.5312
CD5625-5460-50-1-24	4	0.5625	0.546	0.5	4.5	1.5	18°	118°	45°	7.5	3F	0.5625
CD5938-5610-50-1-24	4	0.5938	0.561	0.5	4.5	1.5	18°	118°	45°	7.5	3F	0.5938
CD6250-5920-50-1-24	4	0.6250	0.592	0.5	4.5	1.5	18°	118°	45°	7.5	3F	0.6250
CD6562-6240-50-1-24	4	0.6562	0.624	0.5	4.5	1.5	18°	118°	45°	8	3F	0.6562
CD6875-6550-50-1-24	4	0.6875	0.655	0.5	4.5	1.5	18°	118°	45°	8	3F	0.6875
CD7188-6860-50-1-24	4	0.7188	0.686	0.5	4.5	1.5	18°	118°	45°	8	3F	0.7188
CD7500-7180-50-1-24	4	0.7500	0.718	0.5	4.5	1.5	18°	118°	45°	8	3F	0.7500
CD7812-7490-50-1-24	4	0.7812	0.749	0.5	4.5	1.5	18°	118°	45°	8	3F	0.7812
CD8125-7490-50-1-24	4	0.8125	0.749	0.5	4.5	1.5	18°	118°	45°	8	3F	0.8125
CD8438-8110-50-1-24	4	0.8438	0.811	0.5	4.5	1.5	18°	118°	45°	8	3F	0.8438
CD8750-8430-50-1-24	4	0.8750	0.843	0.5	4.5	1.5	18°	118°	45°	8	3F	0.8750
CD9062-8740-50-1-24	4	0.9062	0.874	0.5	4.5	1.5	18°	118°	45°	8	3F	0.9062
CD9375-9050-50-1-24	4	0.9375	0.905	0.5	4.5	1.5	18°	118°	45°	8	3F	0.9375
CD9688-9360-50-1-24	4	0.9688	0.936	0.5	4.5	1.5	18°	118°	45°	8	3F	0.9688
CD10000-9680-50-1-24	4	1.0000	0.968	0.5	4.5	1.5	18°	118°	45°	9.5	3F	1.0000
CD10313-10000-50-1-24	4	1.0313	1.000	0.5	4.5	1.5	18°	118°	45°	9.5	3F	1.0313
CD10625-10300-50-1-24	4	1.0625	1.030	0.5	4.5	1.5	18°	118°	45°	9.5	3F	1.0625
CD10938-10620-50-1-24	4	1.0938	1.062	0.5	4.5	1.5	18°	118°	45°	9.5	3F	1.0938
CD11250-10920-50-1-24	4	1.1250	1.092	0.5	4.5	1.5	18°	118°	45°	9.5	3F	1.1250
CD11562-11240-50-1-24	4	1.1562	1.124	0.5	4.5	1.5	18°	118°	45°	9.5	3F	1.1562
CD11875-11550-50-1-24	4	1.1875	1.155	0.5	4.5	1.5	18°	118°	45°	9.5	3F	1.1875
CD12188-11870-50-1-24	4	1.2188	1.187	0.5	4.5	1.5	18°	118°	45°	9.5	3F	1.2188
CD12500-12170-50-1-24	4	1.2500	1.217	0.5	4.5	1.5	18°	118°	45°	9.5	3F	1.2500
CD12812-12490-50-1-24	4	1.2812	1.249	0.5	4.5	1.5	18°	118°	45°	9.5	3F	1.2812
CD13126-12810-50-1-24	4	1.3126	1.281	0.5	4.5	1.5	18°	118°	45°	10	3F	1.3126
CD13438-13120-50-1-24	4	1.3438	1.312	0.5	4.5	1.5	18°	118°	45°	10	3F	1.3438
CD13750-13420-50-1-24	4	1.3750	1.342	0.5	4.5	1.5	18°	118°	45°	10	3F	1.3750
CD14062-13740-50-1-24	4	1.4062	1.374	0.5	4.5	1.5	18°	118°	45°	10	3F	1.4062
CD14375-14060-50-1-24	4	1.4375	1.406	0.5	4.5	1.5	18°	118°	45°	10	3F	1.4375
CD14688-14370-50-1-24	4	1.4688	1.437	0.5	4.5	1.5	18°	118°	45°	10	3F	1.4688
CD15000-14670-50-1-24	4	1.5000	1.467	0.5	4.5	1.5	18°	118°	45°	10	3F	1.5000

PR

DD

GB

CD

ST

NC

NH

ACD

DC

SACC


SCC

SFHC

AFC

Core Drill with Dimand Coating

鑽石鍍層領先中心鑽頭

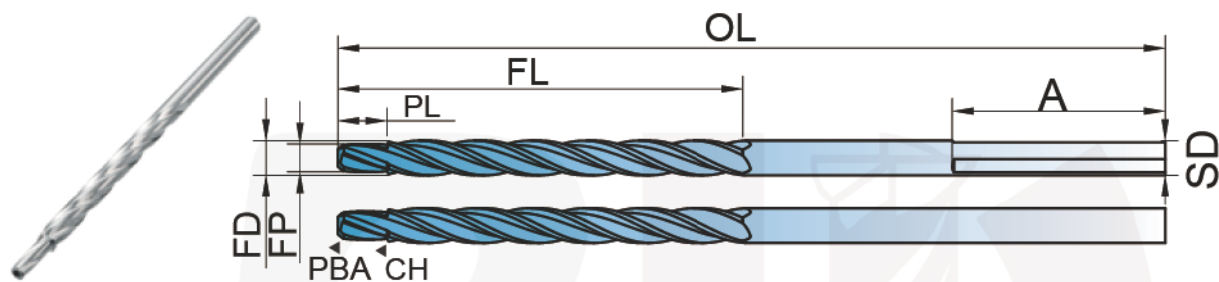

Order Code	Z	FD	PD	PL	FL	A	FS	CH	PBA	OL	HB	inch SD
型號	刃數	大直徑	小直徑	小直徑 刃長	大直徑 刃長	板手 長度	螺旋 角度	大直徑 倒角度	小直徑 倒角度	全長	柄徑 形狀	柄徑
CD1285-1120-50-1-12D	4	0.1285	0.112	0.5	1.5	1.5	18°	118°	45°	3.2	3F	0.1285
CD1360-1190-50-1-12D	4	0.1360	0.119	0.5	1.5	1.5	18°	118°	45°	3.2	3F	0.1360
CD1405-1240-50-1-12D	4	0.1405	0.124	0.5	1.5	1.5	18°	118°	45°	3.2	3F	0.1405
CD1460-1240-50-1-12D	4	0.1460	0.124	0.5	1.5	1.5	18°	118°	45°	3.2	3F	0.1460
CD1440-1280-50-1-12D	4	0.1440	0.128	0.5	1.5	1.5	18°	118°	45°	3.2	3F	0.1440
CD1470-1280-50-1-12D	4	0.1470	0.128	0.5	1.5	1.5	18°	118°	45°	3.2	3F	0.1470
CD1495-1350-50-1-12D	4	0.1495	0.135	0.5	1.5	1.5	18°	118°	45°	3.2	3F	0.1495
CD1520-1350-50-1-12D	4	0.1520	0.135	0.5	1.5	1.5	18°	118°	45°	3.2	3F	0.1520
CD1540-1400-50-1-12D	4	0.1540	0.140	0.5	1.5	1.5	18°	118°	45°	3.2	3F	0.1540
CD1562-1400-50-1-12D	4	0.1562	0.140	0.5	1.5	1.5	18°	118°	45°	3.2	3F	0.1562
CD1570-1430-50-1-12D	4	0.1570	0.143	0.5	1.5	1.5	18°	118°	45°	3.2	3F	0.1570
CD1590-1460-50-1-16D	4	0.1590	0.146	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1590
CD1610-1460-50-1-16D	4	0.1610	0.146	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1610
CD1660-1510-50-1-16D	4	0.1660	0.151	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1660
CD1696-1530-50-1-16D	4	0.1696	0.153	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1696
CD1719-1550-50-1-16D	4	0.1719	0.155	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1719
CD1730-1560-50-1-16D	4	0.1730	0.156	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1730
CD1770-1600-50-1-16D	4	0.1770	0.160	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1770
CD1800-1650-50-1-16D	4	0.1800	0.165	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1800
CD1820-1650-50-1-16D	4	0.1820	0.165	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1820
CD1850-1710-50-1-16D	4	0.1850	0.171	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1850
CD1875-1710-50-1-16D	4	0.1875	0.171	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1875
CD1890-1760-50-1-16D	4	0.1890	0.176	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1890
CD1910-1760-50-1-16D	4	0.1910	0.176	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1910
CD1935-1760-50-1-16D	4	0.1935	0.176	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1935
CD1960-1790-50-1-16D	4	0.1960	0.179	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1960
CD1990-1870-50-1-16D	4	0.1990	0.187	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.1990
CD2010-1870-50-1-16D	4	0.2010	0.187	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.2010
CD2030-1870-50-1-16D	4	0.2030	0.187	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.2030

PR

DD

GB

CD

ST

NC

NH

ACD

DC

SACC

SCC

SFHC

AFC

Core Drill with Dimand Coating

鑽石鍍層領先中心鑽頭



												inch
Order Code	Z	FD	PD	PL	FL	A	FS	CH	PBA	OL	HB	SD
型號	刃數	大直徑	小直徑	小直徑 刃長	大直徑 刃長	板手 長度	螺旋 角度	大直徑 倒角度	小直徑 倒角度	全長	柄徑 形狀	柄徑
CD2040-1900-50-1-16D	4	0.2040	0.190	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.2040
CD2055-1900-50-1-16D	4	0.2055	0.190	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.2055
CD2090-1900-50-1-16D	4	0.2090	0.190	0.5	2.5	1.5	18°	118°	45°	4.3	3F	0.2090
CD2130-1980-50-1-24D	4	0.2130	0.198	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2130
CD2188-2020-50-1-24D	4	0.2188	0.202	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2188
CD2210-2050-50-1-24D	4	0.2210	0.205	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2210
CD2280-2120-50-1-24D	4	0.2280	0.212	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2280
CD2340-2180-50-1-24D	4	0.2340	0.218	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2340
CD2344-2180-50-1-24D	4	0.2344	0.218	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2344
CD2380-2200-50-1-24D	4	0.2380	0.220	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2380
CD2420-2270-50-1-24D	4	0.2420	0.227	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2420
CD2460-2340-50-1-24D	4	0.2460	0.234	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2460
CD2500-2340-50-1-24D	4	0.2500	0.234	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2500
CD2570-2410-50-1-24D	4	0.2570	0.241	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2570
CD2610-2450-50-1-24D	4	0.2610	0.245	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2610
CD2658-2490-50-1-24D	4	0.2658	0.249	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2658
CD2600-2490-50-1-24D	4	0.2600	0.249	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2600
CD2720-2560-50-1-24D	4	0.2720	0.256	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2720
CD2770-2650-50-1-24D	4	0.2770	0.265	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2770
CD2810-2650-50-1-24D	4	0.2810	0.265	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2810
CD2812-2650-50-1-24D	4	0.2812	0.265	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2812
CD2900-2780-50-1-24D	4	0.2900	0.278	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2900
CD2950-2800-50-1-24D	4	0.2950	0.280	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2950
CD2969-2800-50-1-24D	4	0.2969	0.280	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.2969
CD3020-2890-50-1-24D	4	0.3020	0.289	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.3020
CD3125-2960-50-1-24D	4	0.3125	0.296	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.3125
CD3160-3010-50-1-24D	4	0.3160	0.301	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.3160
CD3230-3120-50-1-24D	4	0.3230	0.312	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.3230
CD3281-3120-50-1-24D	4	0.3281	0.312	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.3281
CD3320-3120-50-1-24D	4	0.3320	0.312	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.3320
CD3390-3270-50-1-24D	4	0.3390	0.327	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.3390
CD3438-3270-50-1-24D	4	0.3438	0.327	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.3438
CD3480-3310-50-1-24D	4	0.3480	0.331	0.5	4.5	1.5	18°	118°	45°	6.7	3F	0.3480
CD3580-3430-50-1-24D	4	0.3580	0.343	0.5	4.5	1.5	18°	118°	45°	7	3F	0.3580
CD3594-3430-50-1-24D	4	0.3594	0.343	0.5	4.5	1.5	18°	118°	45°	7	3F	0.3594
CD3680-3570-50-1-24D	4	0.3680	0.357	0.5	4.5	1.5	18°	118°	45°	7	3F	0.3680
CD3750-3590-50-1-24D	4	0.3750	0.359	0.5	4.5	1.5	18°	118°	45°	7	3F	0.3750
CD3770-3590-50-1-24D	4	0.3770	0.359	0.5	4.5	1.5	18°	118°	45°	7	3F	0.3770
CD3860-3590-50-1-24D	4	0.3860	0.359	0.5	4.5	1.5	18°	118°	45°	7	3F	0.3860
CD3906-3760-50-1-24D	4	0.3906	0.376	0.5	4.5	1.5	18°	118°	45°	7	3F	0.3906
CD3970-3850-50-1-24D	4	0.3970	0.385	0.5	4.5	1.5	18°	118°	45°	7	3F	0.3970
CD4040-3900-50-1-24D	4	0.4040	0.390	0.5	4.5	1.5	18°	118°	45°	7	3F	0.4040
CD4062-3900-50-1-24D	4	0.4062	0.390	0.5	4.5	1.5	18°	118°	45°	7	3F	0.4062
CD4130-3900-50-1-24D	4	0.4130	0.390	0.5	4.5	1.5	18°	118°	45°	7	3F	0.4130
CD4219-4050-50-1-24D	4	0.4219	0.405	0.5	4.5	1.5	18°	118°	45°	7	3F	0.4219
CD4375-4210-50-1-24D	4	0.4375	0.421	0.5	4.5	1.5	18°	118°	45°	7	3F	0.4375
CD4531-4370-50-1-24D	4	0.4531	0.437	0.5	4.5	1.5	18°	118°	45°	7	3F	0.4531
CD4688-4820-50-1-24D	4	0.4688	0.482	0.5	4.5	1.5	18°	118°	45°	7	3F	0.4688

PR

DD

GB

CD

ST

NC

NH

ACD

DC

SACC

SCC

SFHC

AFC

Core Drill with Dimand Coating

鑽石鍍層領先中心鑽頭

Order Code	Z	FD	PD	PL	FL	A	FS	CH	PBA	OL	HB	inch
												SD
型號	刃數	大直徑	小直徑	小直徑 刀長	大直徑 刀長	板手 長度	螺旋 角度	大直徑 倒角度	小直徑 倒角度	全長	柄徑 形狀	柄徑
CD4844-4680-50-1-24D	4	0.4844	0.468	0.5	4.5	1.5	18°	118°	45°	7.5	3F	0.4844
CD5000-4830-50-1-24D	4	0.5000	0.483	0.5	4.5	1.5	18°	118°	45°	7.5	3F	0.5000
CD5312-5140-50-1-24D	4	0.5312	0.514	0.5	4.5	1.5	18°	118°	45°	7.5	3F	0.5312
CD5625-5460-50-1-24D	4	0.5625	0.546	0.5	4.5	1.5	18°	118°	45°	7.5	3F	0.5625
CD5938-5610-50-1-24D	4	0.5938	0.561	0.5	4.5	1.5	18°	118°	45°	7.5	3F	0.5938
CD6250-5920-50-1-24D	4	0.6250	0.592	0.5	4.5	1.5	18°	118°	45°	7.5	3F	0.6250
CD6562-6240-50-1-24D	4	0.6562	0.624	0.5	4.5	1.5	18°	118°	45°	8	3F	0.6562
CD6875-6550-50-1-24D	4	0.6875	0.655	0.5	4.5	1.5	18°	118°	45°	8	3F	0.6875
CD7188-6860-50-1-24D	4	0.7188	0.686	0.5	4.5	1.5	18°	118°	45°	8	3F	0.7188
CD7500-7180-50-1-24D	4	0.7500	0.718	0.5	4.5	1.5	18°	118°	45°	8	3F	0.7500
CD7812-7490-50-1-24D	4	0.7812	0.749	0.5	4.5	1.5	18°	118°	45°	8	3F	0.7812
CD8125-7490-50-1-24D	4	0.8125	0.749	0.5	4.5	1.5	18°	118°	45°	8	3F	0.8125
CD8438-8110-50-1-24D	4	0.8438	0.811	0.5	4.5	1.5	18°	118°	45°	8	3F	0.8438
CD8750-8430-50-1-24D	4	0.8750	0.843	0.5	4.5	1.5	18°	118°	45°	8	3F	0.8750
CD9062-8740-50-1-24D	4	0.9062	0.874	0.5	4.5	1.5	18°	118°	45°	8	3F	0.9062
CD9375-9050-50-1-24D	4	0.9375	0.905	0.5	4.5	1.5	18°	118°	45°	8	3F	0.9375
CD9688-9360-50-1-24D	4	0.9688	0.936	0.5	4.5	1.5	18°	118°	45°	8	3F	0.9688
CD10000-9680-50-1-24D	4	1.0000	0.968	0.5	4.5	1.5	18°	118°	45°	9.5	3F	1.0000
CD10313-10000-50-1-24D	4	1.0313	1.000	0.5	4.5	1.5	18°	118°	45°	9.5	3F	1.0313
CD10625-10300-50-1-24D	4	1.0625	1.030	0.5	4.5	1.5	18°	118°	45°	9.5	3F	1.0625
CD10938-10620-50-1-24D	4	1.0938	1.062	0.5	4.5	1.5	18°	118°	45°	9.5	3F	1.0938
CD11250-10920-50-1-24D	4	1.1250	1.092	0.5	4.5	1.5	18°	118°	45°	9.5	3F	1.1250
CD11562-11240-50-1-24D	4	1.1562	1.124	0.5	4.5	1.5	18°	118°	45°	9.5	3F	1.1562
CD11875-11550-50-1-24D	4	1.1875	1.155	0.5	4.5	1.5	18°	118°	45°	9.5	3F	1.1875
CD12188-11870-50-1-24D	4	1.2188	1.187	0.5	4.5	1.5	18°	118°	45°	9.5	3F	1.2188
CD12500-12170-50-1-24D	4	1.2500	1.217	0.5	4.5	1.5	18°	118°	45°	9.5	3F	1.2500
CD12812-12490-50-1-24D	4	1.2812	1.249	0.5	4.5	1.5	18°	118°	45°	9.5	3F	1.2812
CD13126-12810-50-1-24D	4	1.3126	1.281	0.5	4.5	1.5	18°	118°	45°	10	3F	1.3126
CD13438-13120-50-1-24D	4	1.3438	1.312	0.5	4.5	1.5	18°	118°	45°	10	3F	1.3438
CD13750-13420-50-1-24D	4	1.3750	1.342	0.5	4.5	1.5	18°	118°	45°	10	3F	1.3750
CD14062-13740-50-1-24D	4	1.4062	1.374	0.5	4.5	1.5	18°	118°	45°	10	3F	1.4062
CD14375-14060-50-1-24D	4	1.4375	1.406	0.5	4.5	1.5	18°	118°	45°	10	3F	1.4375
CD14688-14370-50-1-24D	4	1.4688	1.437	0.5	4.5	1.5	18°	118°	45°	10	3F	1.4688
CD15000-14670-50-1-24D	4	1.5000	1.467	0.5	4.5	1.5	18°	118°	45°	10	3F	1.5000



PR

DD

GB

CD

ST

NC

NH

ACD

DC

SACC


SCC

SFHC

AFC

HSS Pneumatic Pilot Core Drill

高速鋼氣動領先中心鑽頭

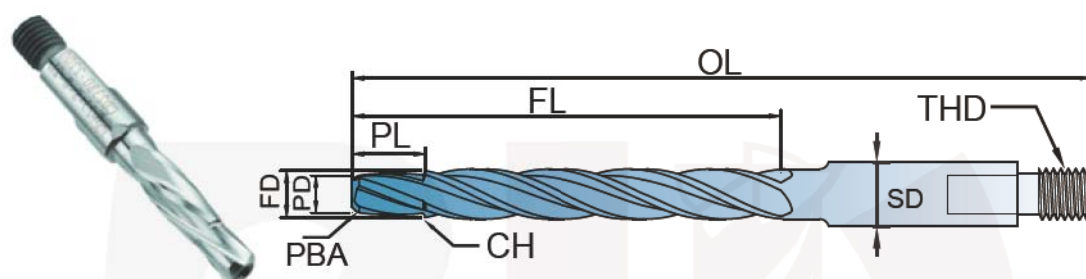

Order Code	Z	FD	PD	PL	FL	A	FS	CH	PBA	OL	THD	SD
型號	刃數	大直徑	小直徑	小直徑 刃長	大直徑 刃長	板手 長度	螺旋 角度	大直徑 倒角度	小直徑 倒角度	全長	柄徑 形狀	柄徑
CD1285-1120-50-2-8	4	0.1285	0.112	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1360-1190-50-2-8	4	0.1360	0.119	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1405-1240-50-2-8	4	0.1405	0.124	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1460-1240-50-2-8	4	0.1460	0.124	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1440-1280-50-2-8	4	0.1440	0.128	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1470-1280-50-2-8	4	0.1470	0.128	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1495-1350-50-2-8	4	0.1495	0.135	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1520-1350-50-2-8	4	0.1520	0.135	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1540-1400-50-2-8	4	0.1540	0.140	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1562-1400-50-2-8	4	0.1562	0.140	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1570-1430-50-2-8	4	0.1570	0.143	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1590-1460-50-2-8	4	0.1590	0.146	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1610-1460-50-2-8	4	0.1610	0.146	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1660-1510-50-2-8	4	0.1660	0.151	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1696-1530-50-2-8	4	0.1696	0.153	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1719-1550-50-2-8	4	0.1719	0.155	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1730-1560-50-2-8	4	0.1730	0.156	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1770-1600-50-2-8	4	0.1770	0.160	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1800-1650-50-2-8	4	0.1800	0.165	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1820-1650-50-2-8	4	0.1820	0.165	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1850-1710-50-2-8	4	0.1850	0.171	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1875-1710-50-2-8	4	0.1875	0.171	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1890-1760-50-2-8	4	0.1890	0.176	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1910-1760-50-2-8	4	0.1910	0.176	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1935-1760-50-2-8	4	0.1935	0.176	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1960-1790-50-2-8	4	0.1960	0.179	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1990-1870-50-2-12	4	0.1990	0.187	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2010-1870-50-2-12	4	0.2010	0.187	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2030-1870-50-2-12	4	0.2030	0.187	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25

HSS Pneumatic Pilot Core Drill

高速鋼氣動領先中心鑽頭

Order Code	Z	FD	PD	PL	FL	A	FS	CH	PBA	OL	inch
型號	刀數	大直徑	小直徑	小直徑 刀長	大直徑 刀長	板手 長度	螺旋 角度	大直徑 倒角度	小直徑 倒角度	全長	柄徑
CD2040-1900-50-2-12	4	0.2040	0.190	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD2055-1900-50-2-12	4	0.2055	0.190	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD2090-1900-50-2-12	4	0.2090	0.190	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD2130-1980-50-2-12	4	0.2130	0.198	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD2188-2020-50-2-12	4	0.2188	0.202	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD2210-2050-50-2-12	4	0.2210	0.205	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD2280-2120-50-2-12	4	0.2280	0.212	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD2340-2180-50-2-12	4	0.2340	0.218	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD2344-2180-50-2-12	4	0.2344	0.218	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD2380-2200-50-2-12	4	0.2380	0.220	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD2420-2270-50-2-12	4	0.2420	0.227	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD2460-2340-50-2-12	4	0.2460	0.234	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD2500-2340-50-2-12	4	0.2500	0.234	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD2570-2410-50-2-12	4	0.2570	0.241	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD2610-2450-50-2-12	4	0.2610	0.245	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD2658-2490-50-2-12	4	0.2658	0.249	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD2600-2490-50-2-12	4	0.2600	0.249	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD2720-2560-50-2-12	4	0.2720	0.256	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD2770-2650-50-2-12	4	0.2770	0.265	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD2810-2650-50-2-12	4	0.2810	0.265	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD2812-2650-50-2-12	4	0.2812	0.265	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD2900-2780-50-2-12	4	0.2900	0.278	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD2950-2800-50-2-12	4	0.2950	0.280	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD2969-2800-50-2-12	4	0.2969	0.280	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD3020-2890-50-2-12	4	0.3020	0.289	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD3125-2960-50-2-12	4	0.3125	0.296	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD3160-3010-50-2-12	4	0.3160	0.301	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD3230-3120-50-2-12	4	0.3230	0.312	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD3281-3120-50-2-12	4	0.3281	0.312	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD3320-3120-50-2-12	4	0.3320	0.312	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD3390-3270-50-2-12	4	0.3390	0.327	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD3438-3270-50-2-12	4	0.3438	0.327	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD3480-3310-50-2-12	4	0.3480	0.331	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD3580-3430-50-2-12	4	0.3580	0.343	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD3594-3430-50-2-12	4	0.3594	0.343	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD3680-3570-50-2-12	4	0.3680	0.357	0.5	2.5	0.25	18°	118°	45°	3	1/4-28 0.25
CD3750-3590-50-4-12	4	0.3750	0.359	0.5	2.5	0.25	18°	118°	45°	3	3/8-24 0.25
CD3770-3590-50-4-12	4	0.3770	0.359	0.5	2.5	0.25	18°	118°	45°	3	3/8-24 0.25
CD3860-3590-50-4-12	4	0.3860	0.359	0.5	2.5	0.25	18°	118°	45°	3	3/8-24 0.25
CD3906-3760-50-4-12	4	0.3906	0.376	0.5	2.5	0.25	18°	118°	45°	3	3/8-24 0.25
CD3970-3850-50-4-12	4	0.3970	0.385	0.5	2.5	0.25	18°	118°	45°	3	3/8-24 0.25
CD4040-3900-50-4-12	4	0.4040	0.390	0.5	2.5	0.25	18°	118°	45°	3	3/8-24 0.25
CD4062-3900-50-4-12	4	0.4062	0.390	0.5	2.5	0.25	18°	118°	45°	3	3/8-24 0.25
CD4130-3900-50-4-12	4	0.4130	0.390	0.5	2.5	0.25	18°	118°	45°	3	3/8-24 0.25
CD4219-4050-50-4-12	4	0.4219	0.405	0.5	2.5	0.25	18°	118°	45°	3	3/8-24 0.25
CD4375-4210-50-4-12	4	0.4375	0.421	0.5	2.5	0.25	18°	118°	45°	3	3/8-24 0.25
CD4531-4370-50-4-12	4	0.4531	0.437	0.5	2.5	0.25	18°	118°	45°	3	3/8-24 0.25
CD4688-4820-50-4-12	4	0.4688	0.482	0.5	2.5	0.25	18°	118°	45°	3	3/8 24 0.25



PR

DD

GB

CD

ST

NC

NH

ACD

DC

SACC

SCC

SFHC

AFC

HSS Pneumatic Pilot Core Drill

高速鋼氣動領先中心鑽頭



Order Code	Z	FD	PD	PL	FL	A	FS	CH	PBA	OL	THD	inch SD
型號	刃數	大直徑	小直徑	小直徑 刃長	大直徑 刃長	板手 長度	螺旋 角度	大直徑 倒角度	小直徑 倒角度	全長	柄徑 形狀	柄徑
CD4844-4680-50-4-12	4	0.4844	0.468	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD5000-4830-50-4-12	4	0.5000	0.483	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD5312-5140-50-4-12	4	0.5312	0.514	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD5625-5460-50-4-16	4	0.5625	0.546	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD5938-5610-50-4-16	4	0.5938	0.561	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD6250-5920-50-4-16	4	0.6250	0.592	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD6562-6240-50-4-16	4	0.6562	0.624	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD6875-6550-50-4-16	4	0.6875	0.655	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD7188-6860-50-4-16	4	0.7188	0.686	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD7500-7180-50-4-16	4	0.7500	0.718	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD7812-7490-50-4-16	4	0.7812	0.749	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD8125-7490-50-4-16	4	0.8125	0.749	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD8438-8110-50-4-16	4	0.8438	0.811	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD8750-8430-50-4-16	4	0.8750	0.843	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD9062-8740-50-4-16	4	0.9062	0.874	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD9375-9050-50-4-16	4	0.9375	0.905	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD9688-9360-50-4-16	4	0.9688	0.936	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD10000-9680-50-4-16	4	1.0000	0.968	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD10313-10000-50-4-16	4	1.0313	1.000	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD10625-10300-50-4-16	4	1.0625	1.030	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD10938-10620-50-4-16	4	1.0938	1.062	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD11250-10920-50-4-16	4	1.1250	1.092	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD11562-11240-50-4-16	4	1.1562	1.124	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD11875-11550-50-4-16	4	1.1875	1.155	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD12188-11870-50-4-16	4	1.2188	1.187	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD12500-12170-50-4-16	4	1.2500	1.217	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD12812-12490-50-4-16	4	1.2812	1.249	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD13126-12810-50-4-16	4	1.3126	1.281	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD13438-13120-50-4-16	4	1.3438	1.312	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD13750-13420-50-4-16	4	1.3750	1.342	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD14062-13740-50-4-16	4	1.4062	1.374	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD14375-14060-50-4-16	4	1.4375	1.406	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD14688-14370-50-4-16	4	1.4688	1.437	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD15000-14670-50-4-16	4	1.5000	1.467	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25

PR

DD

GB

CD

ST

NC

NH

ACD

DC

SACC


SCC

SFHC

AFC

Core Drill with Dimand Coating

鑽石鍍層氣動領先中心鑽頭

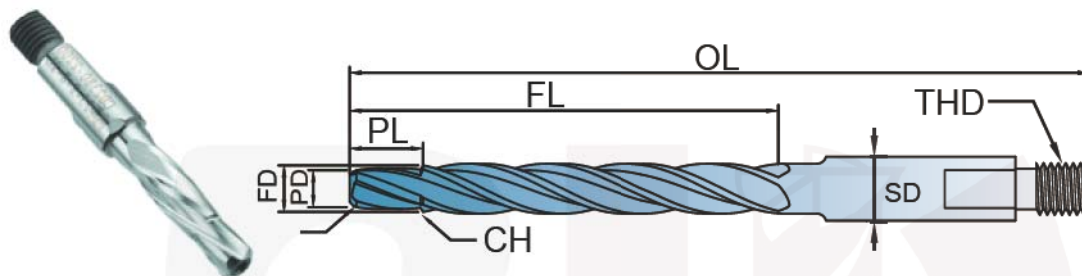

Order Code	Z	FD	PD	PL	FL	A	FS	CH	PBA	OL	THD	inch SD
型號	刃數	大直徑	小直徑	小直徑 刃長	大直徑 刃長	板手 長度	螺旋 角度	大直徑 倒角度	小直徑 倒角度	全長	柄徑 形狀	柄徑
CD1285-1120-50-2-8D	4	0.1285	0.112	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1360-1190-50-2-8D	4	0.1360	0.119	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1405-1240-50-2-8D	4	0.1405	0.124	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1460-1240-50-2-8D	4	0.1460	0.124	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1440-1280-50-2-8D	4	0.1440	0.128	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1470-1280-50-2-8D	4	0.1470	0.128	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1495-1350-50-2-8D	4	0.1495	0.135	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1520-1350-50-2-8D	4	0.1520	0.135	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1540-1400-50-2-8D	4	0.1540	0.140	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1562-1400-50-2-8D	4	0.1562	0.140	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1570-1430-50-2-8D	4	0.1570	0.143	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1590-1460-50-2-8D	4	0.1590	0.146	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1610-1460-50-2-8D	4	0.1610	0.146	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1660-1510-50-2-8D	4	0.1660	0.151	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1696-1530-50-2-8D	4	0.1696	0.153	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1719-1550-50-2-8D	4	0.1719	0.155	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1730-1560-50-2-8D	4	0.1730	0.156	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1770-1600-50-2-8D	4	0.1770	0.160	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1800-1650-50-2-8D	4	0.1800	0.165	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1820-1650-50-2-8D	4	0.1820	0.165	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1850-1710-50-2-8D	4	0.1850	0.171	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1875-1710-50-2-8D	4	0.1875	0.171	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1890-1760-50-2-8D	4	0.1890	0.176	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1910-1760-50-2-8D	4	0.1910	0.176	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1935-1760-50-2-8D	4	0.1935	0.176	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1960-1790-50-2-8D	4	0.1960	0.179	0.5	1.5	0.25	18°	118°	45°	2	1/4-28	0.25
CD1990-1870-50-2-12D	4	0.1990	0.187	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2010-1870-50-2-12D	4	0.2010	0.187	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2030-1870-50-2-12D	4	0.2030	0.187	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25

PR

DD

GB

CD

ST

NC

NH

ACD

DC

SACC

SCC

SFHC

AFC

Core Drill with Dimand Coating

鑽石鍍層氣動領先中心鑽頭



												inch
Order Code	Z	FD	PD	PL	FL	A	FS	CH	PBA	OL	THD	SD
型號	刃數	大直徑	小直徑	小直徑 刃長	大直徑 刃長	板手 長度	螺旋 角度	大直徑 倒角度	小直徑 倒角度	全長	柄徑 形狀	柄徑
CD2040-1900-50-2-12D	4	0.2040	0.190	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2055-1900-50-2-12D	4	0.2055	0.190	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2090-1900-50-2-12D	4	0.2090	0.190	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2130-1980-50-2-12D	4	0.2130	0.198	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2188-2020-50-2-12D	4	0.2188	0.202	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2210-2050-50-2-12D	4	0.2210	0.205	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2280-2120-50-2-12D	4	0.2280	0.212	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2340-2180-50-2-12D	4	0.2340	0.218	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2344-2180-50-2-12D	4	0.2344	0.218	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2380-2200-50-2-12D	4	0.2380	0.220	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2420-2270-50-2-12D	4	0.2420	0.227	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2460-2340-50-2-12D	4	0.2460	0.234	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2500-2340-50-2-12D	4	0.2500	0.234	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2570-2410-50-2-12D	4	0.2570	0.241	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2610-2450-50-2-12D	4	0.2610	0.245	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2658-2490-50-2-12D	4	0.2658	0.249	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2600-2490-50-2-12D	4	0.2600	0.249	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2720-2560-50-2-12D	4	0.2720	0.256	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2770-2650-50-2-12D	4	0.2770	0.265	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2810-2650-50-2-12D	4	0.2810	0.265	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2812-2650-50-2-12D	4	0.2812	0.265	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2900-2780-50-2-12D	4	0.2900	0.278	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2950-2800-50-2-12D	4	0.2950	0.280	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2969-2800-50-2-12D	4	0.2969	0.280	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3020-2890-50-2-12D	4	0.3020	0.289	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3125-2960-50-2-12D	4	0.3125	0.296	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3160-3010-50-2-12D	4	0.3160	0.301	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3230-3120-50-2-12D	4	0.3230	0.312	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3281-3120-50-2-12D	4	0.3281	0.312	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3320-3120-50-2-12D	4	0.3320	0.312	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3390-3270-50-2-12D	4	0.3390	0.327	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3438-3270-50-2-12D	4	0.3438	0.327	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3480-3310-50-2-12D	4	0.3480	0.331	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3580-3430-50-2-12D	4	0.3580	0.343	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3594-3430-50-2-12D	4	0.3594	0.343	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3680-3570-50-2-12D	4	0.3680	0.357	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3750-3590-50-4-12D	4	0.3750	0.359	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD3770-3590-50-4-12D	4	0.3770	0.359	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD3860-3590-50-4-12D	4	0.3860	0.359	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD3906-3760-50-4-12D	4	0.3906	0.376	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD3970-3850-50-4-12D	4	0.3970	0.385	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD4040-3900-50-4-12D	4	0.4040	0.390	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD4062-3900-50-4-12D	4	0.4062	0.390	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD4130-3900-50-4-12D	4	0.4130	0.390	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD4219-4050-50-4-12D	4	0.4219	0.405	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD4375-4210-50-4-12D	4	0.4375	0.421	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD4531-4370-50-4-12D	4	0.4531	0.437	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD4688-4820-50-4-12D	4	0.4688	0.482	0.5	2.5	0.25	18°	118°	45°	3	3/8 24	0.25

PR

DD

GB

CD

ST

NC

NH

ACD

DC

SACC

SCC

SFHC

AFC

Core Drill with Dimand Coating

鑽石鍍層氣動領先中心鑽頭

Order Code	Z	FD	PD	PL	FL	A	FS	CH	PBA	OL	THD	inch
												SD
型號	刃數	大直徑	小直徑	小直徑 刃長	大直徑 刃長	板手 長度	螺旋 角度	大直徑 倒角度	小直徑 倒角度	全長	柄徑 形狀	柄徑
CD4844-4680-50-4-12D	4	0.4844	0.468	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD5000-4830-50-4-12D	4	0.5000	0.483	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD5312-5140-50-4-12D	4	0.5312	0.514	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD5625-5460-50-4-16D	4	0.5625	0.546	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD5938-5610-50-4-16D	4	0.5938	0.561	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD6250-5920-50-4-16D	4	0.6250	0.592	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD6562-6240-50-4-16D	4	0.6562	0.624	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD6875-6550-50-4-16D	4	0.6875	0.655	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD7188-6860-50-4-16D	4	0.7188	0.686	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD7500-7180-50-4-16D	4	0.7500	0.718	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD7812-7490-50-4-16D	4	0.7812	0.749	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD8125-7490-50-4-16D	4	0.8125	0.749	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD8438-8110-50-4-16D	4	0.8438	0.811	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD8750-8430-50-4-16D	4	0.8750	0.843	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD9062-8740-50-4-16D	4	0.9062	0.874	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD9375-9050-50-4-16D	4	0.9375	0.905	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD9688-9360-50-4-16D	4	0.9688	0.936	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD10000-9680-50-4-16D	4	1.0000	0.968	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD10313-10000-50-4-16D	4	1.0313	1.000	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD10625-10300-50-4-16D	4	1.0625	1.030	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD10938-10620-50-4-16D	4	1.0938	1.062	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD11250-10920-50-4-16D	4	1.1250	1.092	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD11562-11240-50-4-16D	4	1.1562	1.124	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD11875-11550-50-4-16D	4	1.1875	1.155	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD12188-11870-50-4-16D	4	1.2188	1.187	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD12500-12170-50-4-16D	4	1.2500	1.217	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD12812-12490-50-4-16D	4	1.2812	1.249	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD13126-12810-50-4-16D	4	1.3126	1.281	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD13438-13120-50-4-16D	4	1.3438	1.312	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD13750-13420-50-4-16D	4	1.3750	1.342	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD14062-13740-50-4-16D	4	1.4062	1.374	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD14375-14060-50-4-16D	4	1.4375	1.406	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD14688-14370-50-4-16D	4	1.4688	1.437	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD15000-14670-50-4-16D	4	1.5000	1.467	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25



PR

DD

GB

CD

ST

NC

NH

ACD

DC

SACC

SCC


SFHC

AFC

HSS Double Margin Pneumatic Core Drill

高速鋼二倍刃長氣動領先中心鑽頭

PCD-2L

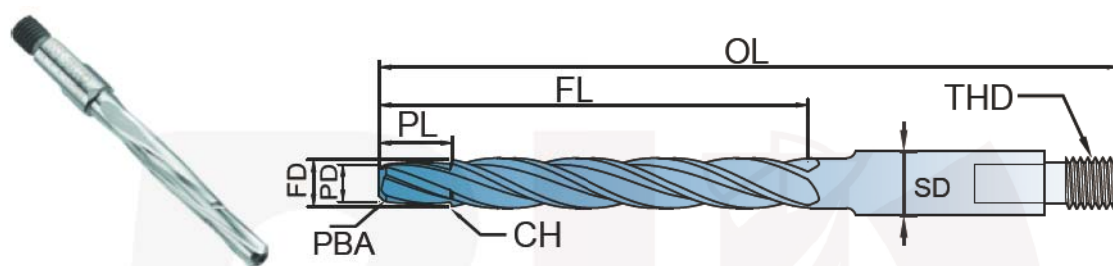

Order Code	Z	FD	PD	PL	FL	A	FS	CH	PBA	OL	THD	SD
型號	刃數	大直徑	小直徑	小直徑 刃長	大直徑 刃長	板手 長度	螺旋 角度	大直徑 倒角度	小直徑 倒角度	全長	柄徑 形狀	柄徑
CD1285-1120-50-2-12-2L	4	0.1285	0.112	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1360-1190-50-2-12-2L	4	0.1360	0.119	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1405-1240-50-2-12-2L	4	0.1405	0.124	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1460-1240-50-2-12-2L	4	0.1460	0.124	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1440-1280-50-2-12-2L	4	0.1440	0.128	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1470-1280-50-2-12-2L	4	0.1470	0.128	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1495-1350-50-2-12-2L	4	0.1495	0.135	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1520-1350-50-2-12-2L	4	0.1520	0.135	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1540-1400-50-2-12-2L	4	0.1540	0.140	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1562-1400-50-2-12-2L	4	0.1562	0.140	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1570-1430-50-2-12-2L	4	0.1570	0.143	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1590-1460-50-2-12-2L	4	0.1590	0.146	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1610-1460-50-2-12-2L	4	0.1610	0.146	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1660-1510-50-2-12-2L	4	0.1660	0.151	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1696-1530-50-2-12-2L	4	0.1696	0.153	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1719-1550-50-2-12-2L	4	0.1719	0.155	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1730-1560-50-2-12-2L	4	0.1730	0.156	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1770-1600-50-2-12-2L	4	0.1770	0.160	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1800-1650-50-2-12-2L	4	0.1800	0.165	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1820-1650-50-2-12-2L	4	0.1820	0.165	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1850-1710-50-2-12-2L	4	0.1850	0.171	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1875-1710-50-2-12-2L	4	0.1875	0.171	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1890-1760-50-2-12-2L	4	0.1890	0.176	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1910-1760-50-2-12-2L	4	0.1910	0.176	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1935-1760-50-2-12-2L	4	0.1935	0.176	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1960-1790-50-2-12-2L	4	0.1960	0.179	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1990-1870-50-2-12-2L	4	0.1990	0.187	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2010-1870-50-2-12-2L	4	0.2010	0.187	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2030-1870-50-2-12-2L	4	0.2030	0.187	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25

HSS Pneumatic Pilot Core Drill

高速鋼氣動領先中心鑽頭

Order Code	Z	FD	PD	PL	FL	A	FS	CH	PBA	OL	THD	inch
												SD
型號	刃數	大直徑	小直徑	小直徑 刀長	大直徑 刀長	板手 長度	螺旋 角度	大直徑 倒角度	小直徑 倒角度	全長	柄徑 形狀	柄徑
CD2040-1900-50-2-12-2L	4	0.2040	0.190	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2055-1900-50-2-12-2L	4	0.2055	0.190	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2090-1900-50-2-12-2L	4	0.2090	0.190	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2130-1980-50-2-12-2L	4	0.2130	0.198	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2188-2020-50-2-12-2L	4	0.2188	0.202	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2210-2050-50-2-12-2L	4	0.2210	0.205	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2280-2120-50-2-12-2L	4	0.2280	0.212	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2340-2180-50-2-12-2L	4	0.2340	0.218	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2344-2180-50-2-12-2L	4	0.2344	0.218	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2380-2200-50-2-12-2L	4	0.2380	0.220	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2420-2270-50-2-12-2L	4	0.2420	0.227	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2460-2340-50-2-12-2L	4	0.2460	0.234	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2500-2340-50-2-12-2L	4	0.2500	0.234	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2570-2410-50-2-12-2L	4	0.2570	0.241	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2610-2450-50-2-12-2L	4	0.2610	0.245	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2658-2490-50-2-12-2L	4	0.2658	0.249	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2600-2490-50-2-12-2L	4	0.2600	0.249	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2720-2560-50-2-12-2L	4	0.2720	0.256	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2770-2650-50-2-12-2L	4	0.2770	0.265	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2810-2650-50-2-12-2L	4	0.2810	0.265	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2812-2650-50-2-12-2L	4	0.2812	0.265	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2900-2780-50-2-12-2L	4	0.2900	0.278	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2950-2800-50-2-12-2L	4	0.2950	0.280	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2969-2800-50-2-12-2L	4	0.2969	0.280	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3020-2890-50-2-12-2L	4	0.3020	0.289	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3125-2960-50-2-12-2L	4	0.3125	0.296	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3160-3010-50-2-12-2L	4	0.3160	0.301	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3230-3120-50-2-12-2L	4	0.3230	0.312	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3281-3120-50-2-12-2L	4	0.3281	0.312	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3320-3120-50-2-12-2L	4	0.3320	0.312	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3390-3270-50-2-12-2L	4	0.3390	0.327	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3438-3270-50-2-12-2L	4	0.3438	0.327	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3480-3310-50-2-12-2L	4	0.3480	0.331	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3580-3430-50-2-12-2L	4	0.3580	0.343	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3594-3430-50-2-12-2L	4	0.3594	0.343	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3680-3570-50-2-12-2L	4	0.3680	0.357	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3750-3590-50-2-12-2L	4	0.3750	0.359	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD3770-3590-50-4-12-2L	4	0.3770	0.359	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD3860-3590-50-4-12-2L	4	0.3860	0.359	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD3906-3760-50-4-12-2L	4	0.3906	0.376	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD3970-3850-50-4-12-2L	4	0.3970	0.385	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD4040-3900-50-4-12-2L	4	0.4040	0.390	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD4062-3900-50-4-12-2L	4	0.4062	0.390	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD4130-3900-50-4-12-2L	4	0.4130	0.390	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD4219-4050-50-4-12-2L	4	0.4219	0.405	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD4375-4210-50-4-12-2L	4	0.4375	0.421	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD4531-4370-50-4-12-2L	4	0.4531	0.437	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD4688-4820-50-4-12-2L	4	0.4688	0.482	0.5	2.5	0.25	18°	118°	45°	3	3/8 24	0.25



PR

DD

GB

CD

ST

NC

NH

ACD

DC

SACC

SCC

SFHC

AFC

HSS Double Margin Pneumatic Core Drill

高速鋼二倍刃長氣動領先中心鑽頭



PR

DD

GB

CD

ST

NC

NH

ACD

DC

SACC

SCC


SFHC

AFC

Order Code	Z	FD	PD	PL	FL	A	FS	CH	PBA	OL	inch	
型號	刃數	大直徑	小直徑	小直徑 刃長	大直徑 刃長	板手 長度	螺旋 角度	大直徑 倒角度	小直徑 倒角度	全長	柄徑 形狀	柄徑
CD4844-4680-50-4-12-2L	4	0.4844	0.468	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD5000-4830-50-4-12-2L	4	0.5000	0.483	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD5312-5140-50-4-12-2L	4	0.5312	0.514	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD5625-5460-50-4-16-2L	4	0.5625	0.546	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD5938-5610-50-4-16-2L	4	0.5938	0.561	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD6250-5920-50-4-16-2L	4	0.6250	0.592	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD6562-6240-50-4-16-2L	4	0.6562	0.624	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD6875-6550-50-4-16-2L	4	0.6875	0.655	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD7188-6860-50-4-16-2L	4	0.7188	0.686	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD7500-7180-50-4-16-2L	4	0.7500	0.718	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD7812-7490-50-4-16-2L	4	0.7812	0.749	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD8125-7490-50-4-16-2L	4	0.8125	0.749	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD8438-8110-50-4-16-2L	4	0.8438	0.811	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD8750-8430-50-4-16-2L	4	0.8750	0.843	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD9062-8740-50-4-16-2L	4	0.9062	0.874	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD9375-9050-50-4-16-2L	4	0.9375	0.905	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD9688-9360-50-4-16-2L	4	0.9688	0.936	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD10000-9680-50-4-16-2L	4	1.0000	0.968	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD10313-10000-50-4-16-2L	4	1.0313	1.000	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD10625-10300-50-4-16-2L	4	1.0625	1.030	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD10938-10620-50-4-16-2L	4	1.0938	1.062	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD11250-10920-50-4-16-2L	4	1.1250	1.092	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD11562-11240-50-4-16-2L	4	1.1562	1.124	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD11875-11550-50-4-16-2L	4	1.1875	1.155	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD12188-11870-50-4-16-2L	4	1.2188	1.187	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD12500-12170-50-4-16-2L	4	1.2500	1.217	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD12812-12490-50-4-16-2L	4	1.2812	1.249	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD13126-12810-50-4-16-2L	4	1.3126	1.281	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD13438-13120-50-4-16-2L	4	1.3438	1.312	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD13750-13420-50-4-16-2L	4	1.3750	1.342	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD14062-13740-50-4-16-2L	4	1.4062	1.374	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD14375-14060-50-4-16-2L	4	1.4375	1.406	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD14688-14370-50-4-16-2L	4	1.4688	1.437	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD15000-14670-50-4-16-2L	4	1.5000	1.467	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25

Diamond coating Double Margin Pneumatic Core Drill

鑽石鍍層二倍刃長氣動領先中心鑽頭

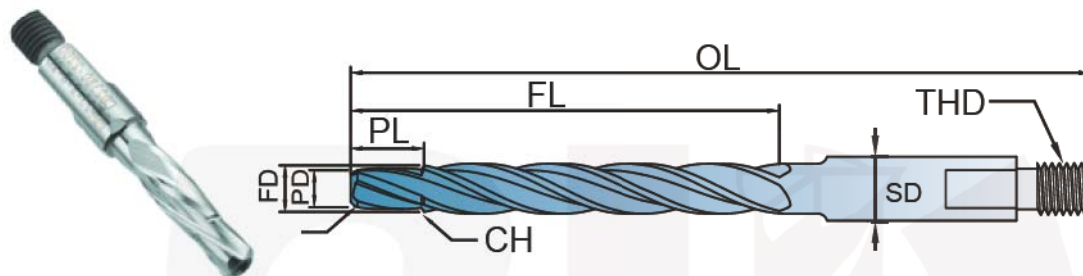

Order Code	Z	FD	PD	PL	FL	A	FS	CH	PBA	OL	inch	SD
型號	刃數	大直徑	小直徑	小直徑 刀長	大直徑 刀長	板手 長度	螺旋 角度	大直徑 倒角度	小直徑 倒角度	全長	柄徑 形狀	柄徑
CD1285-1120-50-2-12-2LD	4	0.1285	0.112	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1360-1190-50-2-12-2LD	4	0.1360	0.119	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1405-1240-50-2-12-2LD	4	0.1405	0.124	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1460-1240-50-2-12-2LD	4	0.1460	0.124	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1440-1280-50-2-12-2LD	4	0.1440	0.128	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1470-1280-50-2-12-2LD	4	0.1470	0.128	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1495-1350-50-2-12-2LD	4	0.1495	0.135	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1520-1350-50-2-12-2LD	4	0.1520	0.135	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1540-1400-50-2-12-2LD	4	0.1540	0.140	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1562-1400-50-2-12-2LD	4	0.1562	0.140	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1570-1430-50-2-12-2LD	4	0.1570	0.143	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1590-1460-50-2-12-2LD	4	0.1590	0.146	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1610-1460-50-2-12-2LD	4	0.1610	0.146	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1660-1510-50-2-12-2LD	4	0.1660	0.151	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1696-1530-50-2-12-2LD	4	0.1696	0.153	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1719-1550-50-2-12-2LD	4	0.1719	0.155	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1730-1560-50-2-12-2LD	4	0.1730	0.156	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1770-1600-50-2-12-2LD	4	0.1770	0.160	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1800-1650-50-2-12-2LD	4	0.1800	0.165	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1820-1650-50-2-12-2LD	4	0.1820	0.165	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1850-1710-50-2-12-2LD	4	0.1850	0.171	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1875-1710-50-2-12-2LD	4	0.1875	0.171	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1890-1760-50-2-12-2LD	4	0.1890	0.176	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1910-1760-50-2-12-2LD	4	0.1910	0.176	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1935-1760-50-2-12-2LD	4	0.1935	0.176	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1960-1790-50-2-12-2LD	4	0.1960	0.179	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD1990-1870-50-2-12-2LD	4	0.1990	0.187	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2010-1870-50-2-12-2LD	4	0.2010	0.187	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2030-1870-50-2-12-2LD	4	0.2030	0.187	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25

PR

DD

GB

CD

ST

NC

NH

ACD

DC

SACC

SCC

SFHC

AFC

Diamond coating Double Margin Pneumatic Core Drill

鑽石鍍層二倍刃長氣動領先中心鑽頭

inch

Order Code	Z	FD	PD	PL	FL	A	FS	CH	PBA	OL	THD	SD
型號	刀數	大直徑	小直徑	小直徑 刃長	大直徑 刃長	板手 長度	螺旋 角度	大直徑 倒角度	小直徑 倒角度	全長	柄徑 形狀	柄徑
CD2040-1900-50-2-12-2LD	4	0.2040	0.190	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2055-1900-50-2-12-2LD	4	0.2055	0.190	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2090-1900-50-2-12-2LD	4	0.2090	0.190	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2130-1980-50-2-12-2LD	4	0.2130	0.198	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2188-2020-50-2-12-2LD	4	0.2188	0.202	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2210-2050-50-2-12-2LD	4	0.2210	0.205	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2280-2120-50-2-12-2LD	4	0.2280	0.212	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2340-2180-50-2-12-2LD	4	0.2340	0.218	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2344-2180-50-2-12-2LD	4	0.2344	0.218	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2380-2200-50-2-12-2LD	4	0.2380	0.220	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2420-2270-50-2-12-2LD	4	0.2420	0.227	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2460-2340-50-2-12-2LD	4	0.2460	0.234	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2500-2340-50-2-12-2LD	4	0.2500	0.234	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2570-2410-50-2-12-2LD	4	0.2570	0.241	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2610-2450-50-2-12-2LD	4	0.2610	0.245	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2658-2490-50-2-12-2LD	4	0.2658	0.249	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2600-2490-50-2-12-2LD	4	0.2600	0.249	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2720-2560-50-2-12-2LD	4	0.2720	0.256	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2770-2650-50-2-12-2LD	4	0.2770	0.265	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2810-2650-50-2-12-2LD	4	0.2810	0.265	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2812-2650-50-2-12-2LD	4	0.2812	0.265	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2900-2780-50-2-12-2LD	4	0.2900	0.278	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2950-2800-50-2-12-2LD	4	0.2950	0.280	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD2969-2800-50-2-12-2LD	4	0.2969	0.280	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3020-2890-50-2-12-2LD	4	0.3020	0.289	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3125-2960-50-2-12-2LD	4	0.3125	0.296	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3160-3010-50-2-12-2LD	4	0.3160	0.301	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3230-3120-50-2-12-2LD	4	0.3230	0.312	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3281-3120-50-2-12-2LD	4	0.3281	0.312	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3320-3120-50-2-12-2LD	4	0.3320	0.312	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3390-3270-50-2-12-2LD	4	0.3390	0.327	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3438-3270-50-2-12-2LD	4	0.3438	0.327	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3480-3310-50-2-12-2LD	4	0.3480	0.331	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3580-3430-50-2-12-2LD	4	0.3580	0.343	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3594-3430-50-2-12-2LD	4	0.3594	0.343	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3680-3570-50-2-12-2LD	4	0.3680	0.357	0.5	2.5	0.25	18°	118°	45°	3	1/4-28	0.25
CD3750-3590-50-2-12-2LD	4	0.3750	0.359	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD3770-3590-50-4-12-2LD	4	0.3770	0.359	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD3860-3590-50-4-12-2LD	4	0.3860	0.359	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD3906-3760-50-4-12-2LD	4	0.3906	0.376	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD3970-3850-50-4-12-2LD	4	0.3970	0.385	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD4040-3900-50-4-12-2LD	4	0.4040	0.390	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD4062-3900-50-4-12-2LD	4	0.4062	0.390	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD4130-3900-50-4-12-2LD	4	0.4130	0.390	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD4219-4050-50-4-12-2LD	4	0.4219	0.405	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD4375-4210-50-4-12-2LD	4	0.4375	0.421	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD4531-4370-50-4-12-2LD	4	0.4531	0.437	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD4688-4820-50-4-12-2LD	4	0.4688	0.482	0.5	2.5	0.25	18°	118°	45°	3	3/8 24	0.25

PR

DD

GB

CD

ST

NC

NH

ACD

DC

SACC

SCC

SFHC

AFC

Diamond coating Double Margin Pneumatic Core Drill

鑽石鍍層二倍刃長氣動領先中心鑽頭

Order Code	Z	FD	PD	PL	FL	A	FS	CH	PBA	OL	inch	SD
型號	刃數	大直徑	小直徑	小直徑 刃長	大直徑 刃長	板手 長度	螺旋 角度	大直徑 倒角度	小直徑 倒角度	全長	柄徑 形狀	柄徑
CD4844-4680-50-4-12-2LD	4	0.4844	0.468	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD5000-4830-50-4-12-2LD	4	0.5000	0.483	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD5312-5140-50-4-12-2LD	4	0.5312	0.514	0.5	2.5	0.25	18°	118°	45°	3	3/8-24	0.25
CD5625-5460-50-4-16-2LD	4	0.5625	0.546	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD5938-5610-50-4-16-2LD	4	0.5938	0.561	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD6250-5920-50-4-16-2LD	4	0.6250	0.592	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD6562-6240-50-4-16-2LD	4	0.6562	0.624	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD6875-6550-50-4-16-2LD	4	0.6875	0.655	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD7188-6860-50-4-16-2LD	4	0.7188	0.686	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD7500-7180-50-4-16-2LD	4	0.7500	0.718	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD7812-7490-50-4-16-2LD	4	0.7812	0.749	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD8125-7490-50-4-16-2LD	4	0.8125	0.749	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD8438-8110-50-4-16-2LD	4	0.8438	0.811	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD8750-8430-50-4-16-2LD	4	0.8750	0.843	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD9062-8740-50-4-16-2LD	4	0.9062	0.874	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD9375-9050-50-4-16-2LD	4	0.9375	0.905	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD9688-9360-50-4-16-2LD	4	0.9688	0.936	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD10000-9680-50-4-16-2LD	4	1.0000	0.968	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD10313-10000-50-4-16-2LD	4	1.0313	1.000	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD10625-10300-50-4-16-2LD	4	1.0625	1.030	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD10938-10620-50-4-16-2LD	4	1.0938	1.062	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD11250-10920-50-4-16-2LD	4	1.1250	1.092	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD11562-11240-50-4-16-2LD	4	1.1562	1.124	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD11875-11550-50-4-16-2LD	4	1.1875	1.155	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD12188-11870-50-4-16-2LD	4	1.2188	1.187	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD12500-12170-50-4-16-2LD	4	1.2500	1.217	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD12812-12490-50-4-16-2LD	4	1.2812	1.249	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD13126-12810-50-4-16-2LD	4	1.3126	1.281	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD13438-13120-50-4-16-2LD	4	1.3438	1.312	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD13750-13420-50-4-16-2LD	4	1.3750	1.342	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD14062-13740-50-4-16-2LD	4	1.4062	1.374	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD14375-14060-50-4-16-2LD	4	1.4375	1.406	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD14688-14370-50-4-16-2LD	4	1.4688	1.437	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25
CD15000-14670-50-4-16-2LD	4	1.5000	1.467	0.5	3.5	0.25	18°	118°	45°	4	3/8-24	0.25



PR

DD

GB

CD

ST

NC

NH

ACD

DC

SACC

SCC

SFHC

AFC